


Borkrone for løsmasser

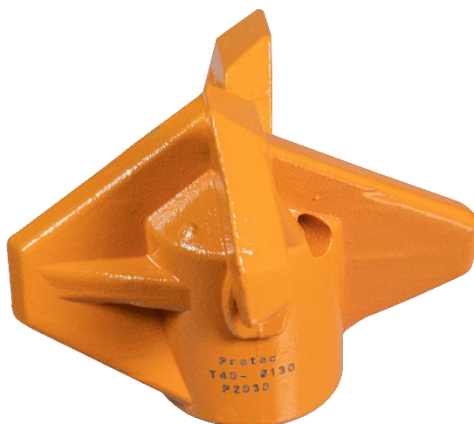

Engangs borkroner for boring i leire og bløt jord. Brukes sammen med Selvborende ankerstag. Anbefales ikke til stein og fjell.

Lagerprogram:

Borkrone R32/Ø76 løsmasse
 Borkrone R38/Ø110 løsmasse
 Borkrone R38/Ø150 løsmasse
 Borkrone T40/Ø130 løsmasse
 Borkrone T40/Ø175 løsmasse
 Borkrone R51/Ø130 løsmasse

Teknisk informasjon:


Venstregjengnet etter ISO 10208 / ISO 1720. (T40, Pretec T gjenge). Leveres våtlakkert for korrosjonsbeskyttelse ved transport og lagring.

Borkrone	Dimensjon (høyde / diameter)	Vekt kg/stk
R32x76	82/76	0,7
R38x110	100x110	1,1
R38x150	140x150	2,4
T40x130	100/130	1,2
T40x175	116/175	1,7
R51x130	105x110	2,0

Tilbehør:

Selvborende stag.

Clay bit

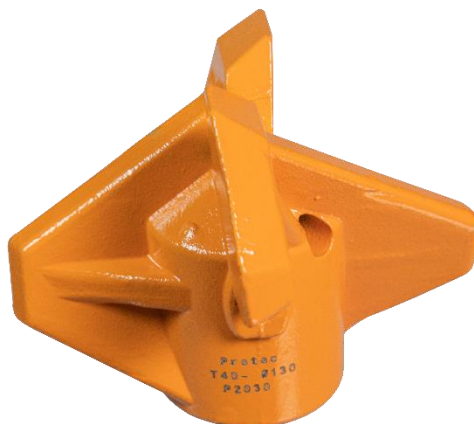

Single use clay bits for clay and soft soil. For use with self drilling anchor (SDA). Not recommended for drilling through mountain rocks and stone ground.

Stock programme:

Clay bit R32/Ø76
 Clay bit R38/Ø110
 Clay bit R38/Ø150
 Clay bit T40/Ø130
 Clay bit T40/Ø175
 Clay bit R51/Ø130

Technical information:

Left hand threaded acc. ISO 10208 / ISO 1720. (T40, Pretec T thread). Wet painted for corrosion protection during transport and storage.

Clay bit	Dimension (height / diameter)	Weight (kg/pc)
R32x76	82/76	0,7
R38x110	100x110	1,1
R38x150	140x150	2,4
T40x130	100/130	1,2
T40x175	116/175	1,7
R51x130	105x110	2,0

Accessories

Self-drilling anchor.