

## Stor øyemutter uten gjenger



Stort øye til selvdrillende bolter brukes når man skal feste annet utstyr til anker, for eksempel wire og sjakler fra rasgjerder. Kan brukes sammen med selv borende ankerstag og kombinasjonsbolter med ekspansjonshylse. Øyet består av et glatt stålrør med en sveist bøyle og er merket med innvendig rørdiameter. Må brukes i kombinasjon med en eller to muttere.

### Lagerprogram:

Ø43,5 for dagskringsbolt R32/15


Ø57,5 for dagskringsbolt R38/19 og T40/16

### Teknisk informasjon:

Sveist stål i kvalitet S355. Varmforsinket iht EN-ISO 1461. Ultførelse iht. ISO 5817 C og EN 1090 EXC 2.

Mekaniske egenskaper gjelder for rett strekk. Øyet tres over enden på dagskringsbolten og låses med kontramutter.

Id(mm)	Od(mm)	L(mm)	W(mm)	Flytegrense anker kN, min.	Bruddstyrke bøyle kN, min.	Vekt (Kg)	Sjakkell tilkobling
43,5	63,5	345	200	260	500	4,1	Min 5/8"
57,5	82,5	390	220	525	700	6,5	Min 3/4"

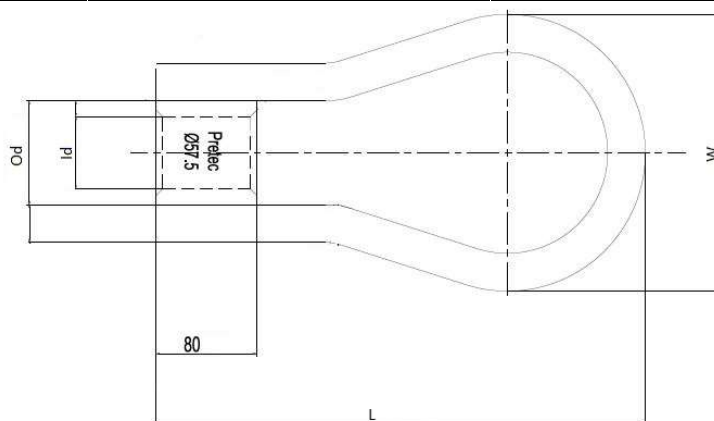

### Tilbehør:

Mutter sfærisk R32x45 Pc-Coat

Mutter Sfærisk T40/16 Pc-Coat

Mutter sfærisk R38x50 Pc-Coat

## Large eye without thread



Large eye is used as fixing point for rock fall fences etc. Can be used together with self drilling anchor bars or combination bolts with expansion shell. The product consists of a steel tube welded to a solid steel bar. It is marked with inner pipe diameter. Shall be used with one or two dome nuts.

### Stock programme:

Ø 43,5 for SDA R32/15


Ø57,5 for SDA R38/19 and T40/16

### Technical information:

Welded and galvanized eye for self drilling anchor. Hot dip galvanized according to EN ISO 1461

Manufacturing and mechanical characteristics in accordance with ISO 5817C and EN 1090 EXC2. Mechanical properties are for straight tension. Mount eye on end of anchor, secure with corresponding spherical nut.

Id(mm)	Od(mm)	L(mm)	W(mm)	Yield anchor kN,min.	Tensile strength anchor bar kN, min.	Weight(Kg)	Shackle dimension
43,5	63,5	345	200	260	500	4,1	Min 5/8"
57,5	82,5	390	220	525	700	6,5	Min 3/4"

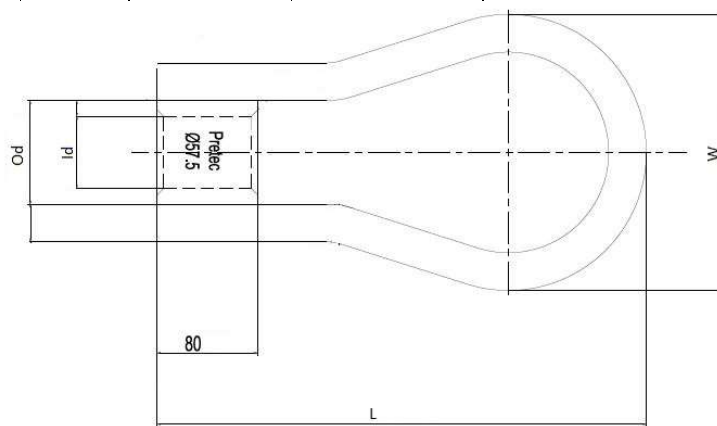

### Accessories:

Nut spherical R32x45 Pc-Coat

Nut spherical T40/16 Pc-Coat

Nut spherical R38x50 Pc-Coat